

Signature

Multix Barrel



Driven by passion.

T28 S


28 MM (1") SOFT DOME TWEETER

A T28S soft dome version for smooth response and homogeneous sound dispersion without aggressiveness. Its natural sound adapts to a wide range of musical styles.


- 28 mm (1") silk dome tweeter
- High efficiency neodymium magnet with rear chamber
- High precision machined aluminium front plate easy to install
- Sound transparent protective grill

TECHNICAL SPECIFICATIONS

Component	Tweeter	
Max power	100 W	
Nominal power	20 W	
Impedance	6 Ω	
Freq. Response	1.5 kHz - 26 KHz	
Sensitivity (2,83V/1m)	88.3 dB	
Magnet	Neodymium	
Magnet size $\varnothing$	27 x 3 mm	1.063" x 0.118"
Weight of one component	0.12 kg	0.265 lb
Voice coil $\varnothing$	28 mm	1.102"
Voice coil height	2 mm	0.079 "
Dome	Soft dome	

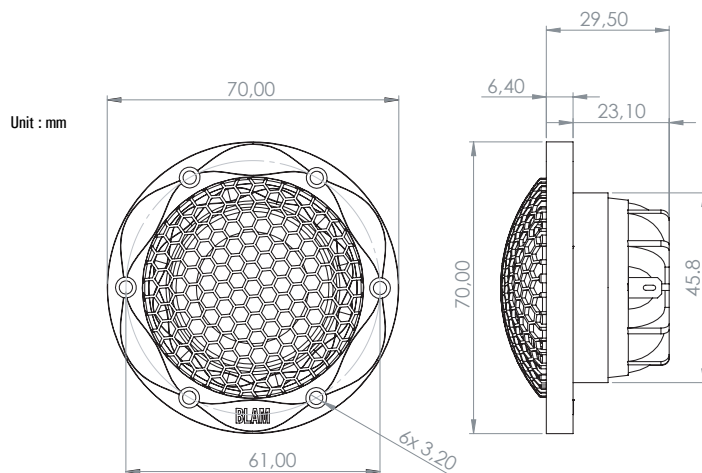

FREQUENCY RESPONSE / IMPEDANCE

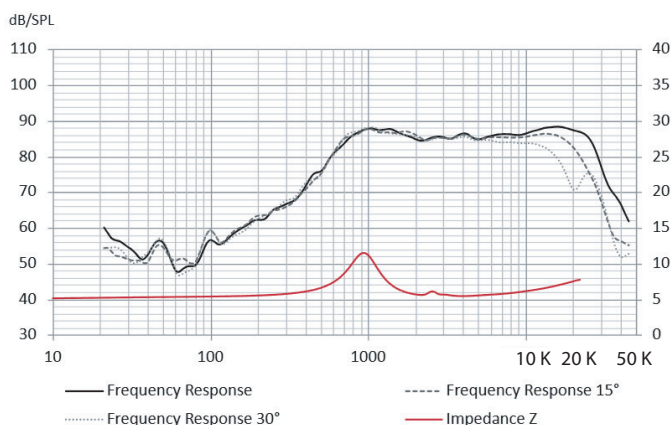

THIELE-SMALL PARAMETERS

Effective $\varnothing$ (d)	0 mm
Sd	9 cm ²
Xmax	0
Re	5 Ω
Fs	943.36 Hz
Le	-
L2	-
Vas	-
Mms	-
Cms	-
BL	-
Qts	-
Qes	-
Qms	-
Sensitivity (dB/W/m)	86.3 dB

contact@blam-audio.fr
www.facebook.com/blamaudio

blam-audio.com