

Signature

T25 MG

25 MM (1") MAGNESIUM DOME TWEETER



Driven by passion.

A T25MG magnesium dome version for smooth response and homogeneous sound dispersion without aggressiveness. Its natural sound adapts to a wide range of musical styles.


- 25 mm (1") magnesium dome tweeter
- High efficiency neodymium magnet with rear chamber
- High precision machined aluminium front plate easy to install
- Sound transparent protective grill




TECHNICAL SPECIFICATIONS

Component	Tweeter	
Max power	100 W	
Nominal power	15 W	
Impedance	5 Ω	
Freq. Response	1.2 KHz - 25 KHz	
Sensitivity (2,83V/1m)	90.3 dB	
Magnet	Neodymium	
Magnet size $\varnothing$	25 x 4 mm	0.965" x 0.138"
Weight of one component	0.11 kg	0.0004 lb
Voice coil $\varnothing$	25 mm	1.000"
Voice coil height	1.7 mm	0.067 "
Dome	Magnesium	

Unit : mm

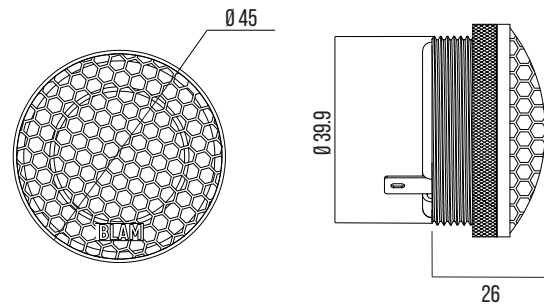

FREQUENCY RESPONSE / IMPEDANCE

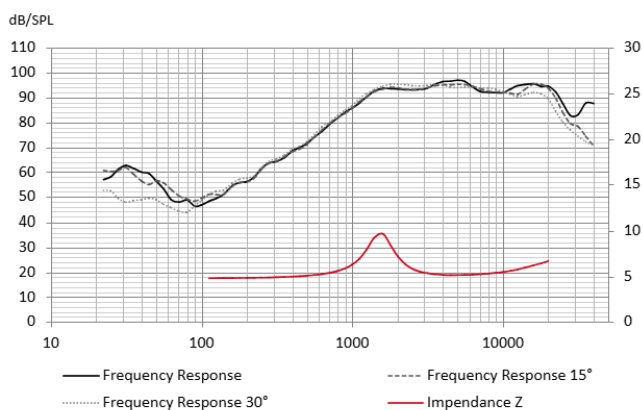

THIELE-SMALL PARAMETERS

Effective $\varnothing$ (d)	32 mm
Sd	8.04 cm ²
Xmax	0
Re	5.14 Ω
Fs	1600 Hz
Le	-
L2	-
Vas	-
Mms	-
Cms	-
BL	-
Qts	-
Qes	-
Qms	-
Sensitivity (dB/W/m)	90.3 dB

contact@blam-audio.fr
www.facebook.com/blamaudio

blam-audio.com